

Miniature PCB Power Relay

HG4124



FEATURES

- 5A to 10A contact capacity
- 1 Form A to 2 Form C contact forms for choice
- 5 KV dielectric strength between coil and contacts
- Sealed and dust cover version available
- UL, CUR approved

TYPICAL APPLICATIONS

- Home appliances
- Office machine
- Vending machine
- Air conditioner, refrigerator

CONTACT RATING

Form	1 Form A (1H) 1 Form C (1Z)	2 Form A (2H) 2 Form C (2Z)
Rated Load	10A, 220VAC/30VDC; TV-5	5A, 250VAC/30VDC
Max. Switching Current	10A	10A
Max. Switching Voltage	250VAC/30VDC	250VAC/30VDC
Max. Switching Power	2200VA/300W	1100VA/150W

UL/CUR RATING

Form	1 Form A (1H) 1 Form C (1Z)	2 Form A (2H) 2 Form C (2Z)
General Purpose	10A, 277VAC (NO)	10A, 250VAC/30VDC
Resistive	10A, 30VDC	8A, 30VDC
TV	5A, 120VAC (NO)	3A, 125VDC
Motor	1/3 HP, 250VAC 1/4 HP, 125VAC (NO)	

CONTACT DATA

Material		AgCdO
Initial Contact Resistance		50 mΩ max. at 1A, 6VDC
Service Life	Mechanical	10 ⁷ ops.
	Electrical	10 ⁵ ops.

COIL DATA

Coil Voltage Code	Nominal Voltage (VDC)	Resistance (Ω) ±10%		Must Operate Voltage max. (VDC)	Must Release Voltage min. (VDC)
		Power Consumption			
003	3	17	0.55W	2.25	0.3
005	5	47		3.75	0.5
006	6	68		4.50	0.6
009	9	160		6.75	0.9
012	12	275		9.00	1.2
018	18	650		13.50	1.8
024	24	1100*		18.00	2.4
048	48	4170*		36.00	4.8
060	60	7000*		45.00	6.0


CHARACTERISTICS

Operate Time	15 ms. max.
Release Time	5 ms. max.
Insulation Resistance	1000 MΩ, at 500 VDC, 50%RH
Dielectric Strength	5000 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts 3000 Vrms, 1 min. between poles
Shock Resistance	10 g, 11ms. functional; 100g, destructive
Vibration Resistance	DA 1.5mm, 10 - 55 Hz
Ambient Temperature	-40°C to 70°C
Weight	18 g, approx.


ORDERING DESIGNATION

Example:	HG4124 /	012 -	1Z	2
Model				
Coil Voltage Code				
Contact Form				
1H: 1 Form A; 1Z: 1 Form C				
2H: 2 Form A; 2Z: 2 Form C				
Version				
1: Sealed; 2: Dust Cover				

REFERENCE CURVES

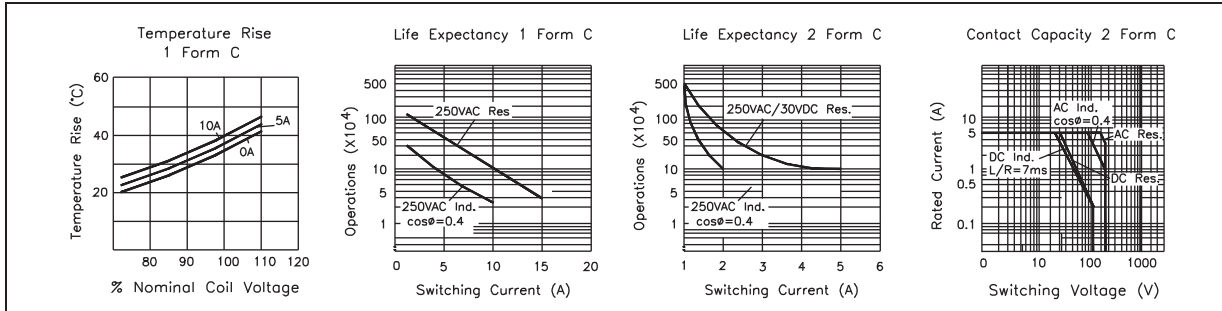

OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAMS (mm)

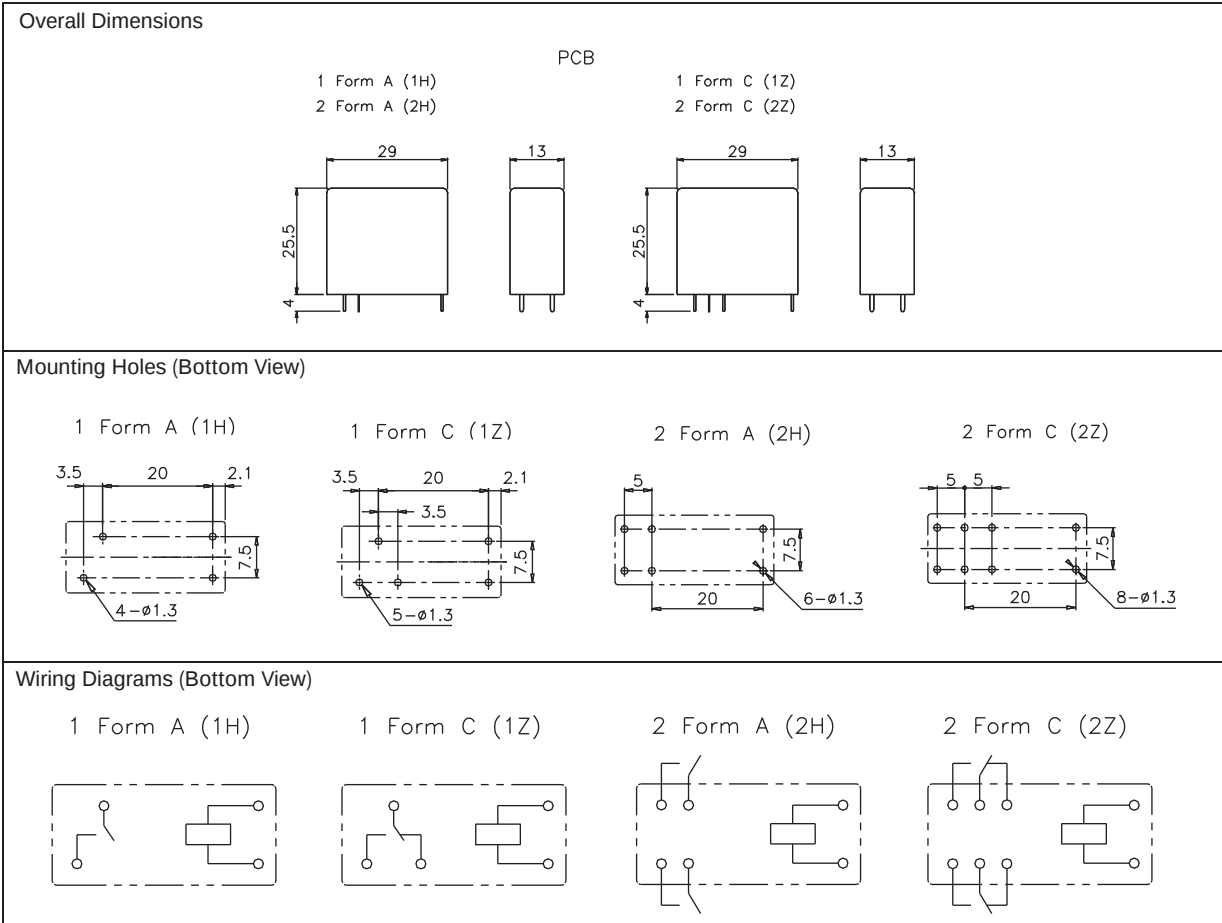

NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
2. Coil resistance with * mark is ±15%.
3. Custom-made services available with operational quantity. Please let us know your special requirements.
4. Specifications subject to change without prior notice.

T Y H Enterprise Limited
Room 1620B, Nan Fung Centre
264-298 Castle Peak Road
Tsuen Wan, N.T.
Hong Kong
Tel: 852-2416-0132
Fax: 852-2413-6229
<http://www.tyhhk.com>
email: info@tyhhk.com

Plant: Shanghai Hi-Gradex Relay Mfg. Co., Ltd.
918 Shixin Road
Airport Town
Pudong New Area
Shanghai 201202
China
Tel: 86-21-6299-5619 / -5877
Fax: 86-21-6299-5619
email: tyhesh@online.sh.cn