

FEATURES

- Two independent relay installed in one package
- Miniaturized structure, light weight
- Improved contact capacity
- Big gap type available for heavy motor load switching

TYPICAL AUTOMOTIVE APPLICATIONS

- Power antenna
- Power window
- Interval wiper
- Slide roof control
- Tilt lock wheel
- Automatic door lock
- Automatic seat adjustment

CONTACT DATA

Form	2 Form C (2Z)	
Max. Switching Current	Make	60A
	Break	20A
Material	AgNi0.15, AgSnOInO	
Max. Switching Voltage	16VDC	
Max. Continuous Current	35A, 10 min; 25A, 1 hr	
Min. Load	0.1A, 5VDC	
Service Life	Mechanical	10 ⁷ ops.
	Electrical	10 ⁵ ops. see Note 3

COIL DATA

Type	Coil Voltage Code	Nominal Voltage (VDC)	Resistance (Ω) ±10%	Must Operate Voltage max. (VDC)	Must Release Voltage min. (VDC)
Standard 0.6W	006	6	60	3.6	0.6
	009	9	135	5.4	0.9
	012	12	240	7.3	1.2
	024	24	960	14.4	2.4
Big Gap 0.8W	006	6	45	3.6	0.6
	009	9	100	5.4	0.9
	012	12	180	7.3	1.2
	024	24	720	14.4	2.4

CHARACTERISTICS


Operate Time	10 ms. typical
Release Time	5 ms. typical
Insulation Resistance	100 MΩ, at 500 VDC, 50%RH
Dielectric Strength	500 Vrms, 1 min.
Shock Resistance	10 g, 11ms.
Vibration Resistance	DA 1.5 mm, 10 - 55 Hz
Drop Resistance	1 M height drop on concrete
Power Consumption	Standard: 0.6W; Big Gap: 0.8 W
Ambient Temperature	-30 C to 85 C operating; -40 C to 100 C storage
Weight	13 g, approx.

ORDERING DESIGNATION


Example:	HG4508 /	012 -	2Z	1	A	G
Model						
Coil Voltage Code						
Contact Form						
2Z: 2 Form C						
Version						
1: Sealed; 2: Dust Cover						
Contact Material						
Nil: AgNi10; A: AgNi0.15; C: AgCdO; S: AgSnOInO						
Contact gap						
Nil: Standard 0.6W; G: Big Gap 0.8W						

REFERENCE CURVE

Power Load Limit

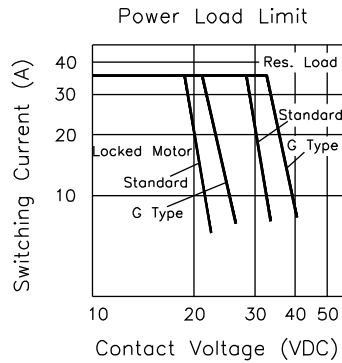


Life Expectancy

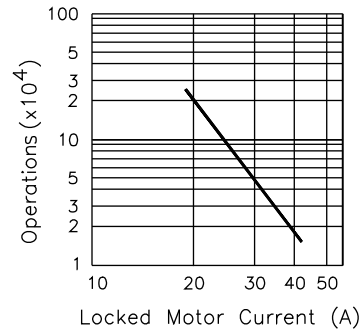


OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAM (mm)


Overall Dimensions

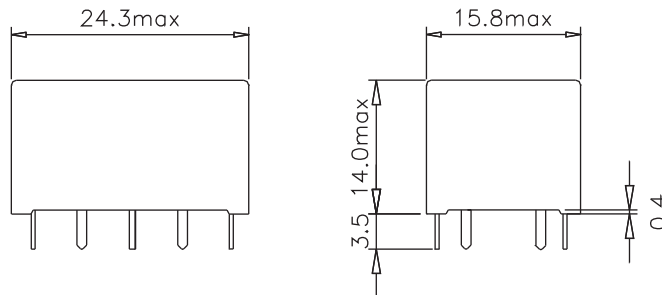

Mounting Holes (Bottom View)

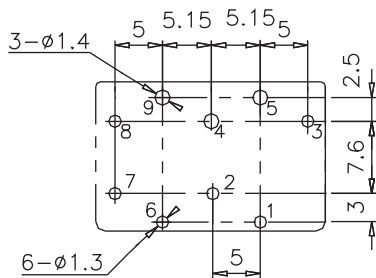

Wiring Diagram (Bottom View)



NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
2. Maximum make current refers to inrush current of motor load.
3. Electrical life obtained at motor load of locked rotor at 20A, 14VDC with operating frequency of 1 ops/sec.
4. Custom-made services available with operational quantity. Please let us know your special requirements.
5. Specifications subject to change without prior notice.

T Y H Enterprise Limited
Room 1620B, Nan Fung Centre
264-298 Castle Peak Road
Tsuen Wan, N.T.
Hong Kong
Tel: 852-2416-0132
Fax: 852-2413-6229
<http://www.tyhhk.com>
email: info@tyhhk.com

Plant: Shanghai Hi-Gradex Relay Mfg. Co., Ltd
918 Shixin Road
Airport Town
Pudong New Area
Shanghai 201202
China
Tel: 86-21-6299-5619 / -5877
Fax: 86-21-6299-5619
email: tyhesh@online.sh.cn