

FEATURES

- Subminiature type, compact design
- Heavy duty, contact capacity up to 12A, 120VAC
- Low cost PCB relay

TYPICAL APPLICATIONS

- Office machine
- Home appliances
- Audio equipment
- Automotive control

CONTACT RATING

Type	HG4230
Resistive	12A, 120VAC
	12A, 28VDC
	7A, 240VAC
TV	5A, 120VAC

UL/CSA/TUV RATING

Type	HG4230
Resistive	12A, 120VAC (UL/CSA)
	12A, 28VDC (UL/CSA)
	6A, 240VAC (TUV)
	10A, 28VDC (TUV)

CONTACT DATA

Material	AgCdO, AgSnOInO	
Initial Contact Resistance	100 mΩ max. at 0.1A, 6VDC	
Service Life	Mechanical	10 ⁷ ops.
	Electrical	10 ⁵ ops.

COIL DATA

Type	Coil Voltage Code	Nominal Voltage (VDC)	Resistance (Ω) ± 10%				Must Operate Voltage max. (VDC)	Must Release Voltage min. (VDC)
			Power Consumption					
			Standard		Sensitive			
HG4230	003	3	20	0.45W	25	0.36W	2.25	0.3
	006	6	80		100		4.5	0.6
	009	9	180		225		6.75	0.9
	012	12	320		400		9.0	1.2
	024	24	1280		1600		18.0	2.4
	048	48	4500		6400		36.0	4.8


CHARACTERISTICS

Operate Time	15 ms. typical
Release Time	5 ms. typical
Insulation Resistance	100 MΩ, at 500 VDC, 50%RH
Dielectric Strength	1500 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts
Shock Resistance	10 g, 11ms. functional; 100g, destructive
Vibration Resistance	DA 1.5mm, 10 - 55 Hz, functional
Power Consumption	Standard: 0.45W Sensitive: 0.36W
Ambient Temperature	-30°C to 55°C
Weight	12 g, approx.


ORDERING DESIGNATION

Example:	HG4230	012-	Z	1	C	L
Model						
Coil Voltage Code						
Contact Form						
H: 1 Form A; D: 1 Form B; Z: 1 Form C						
Version						
1: Sealed; 2: Flux Free; 3: Dust Cover						
Contact Material						
Nil: AgNi10; A: AgNi0.15; C: AgCdO; S: AgSnOInO						
Coil Sensitivity						
Nil: Standard 0.45W; L: Sensitive 0.36W						

REFERENCE CURVES

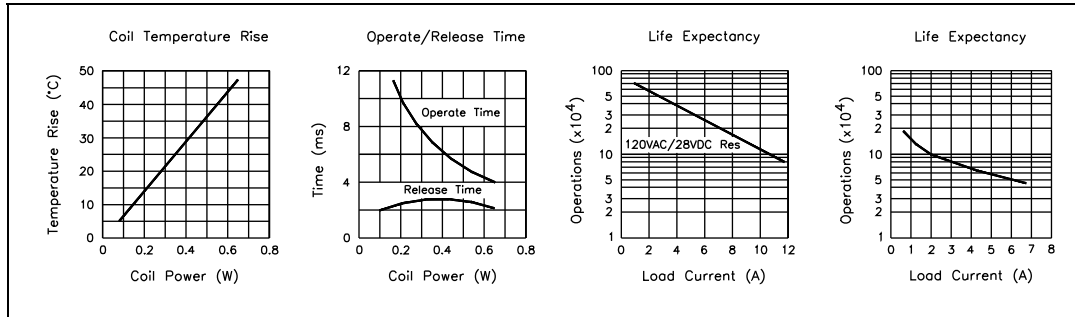

OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAMS (mm)

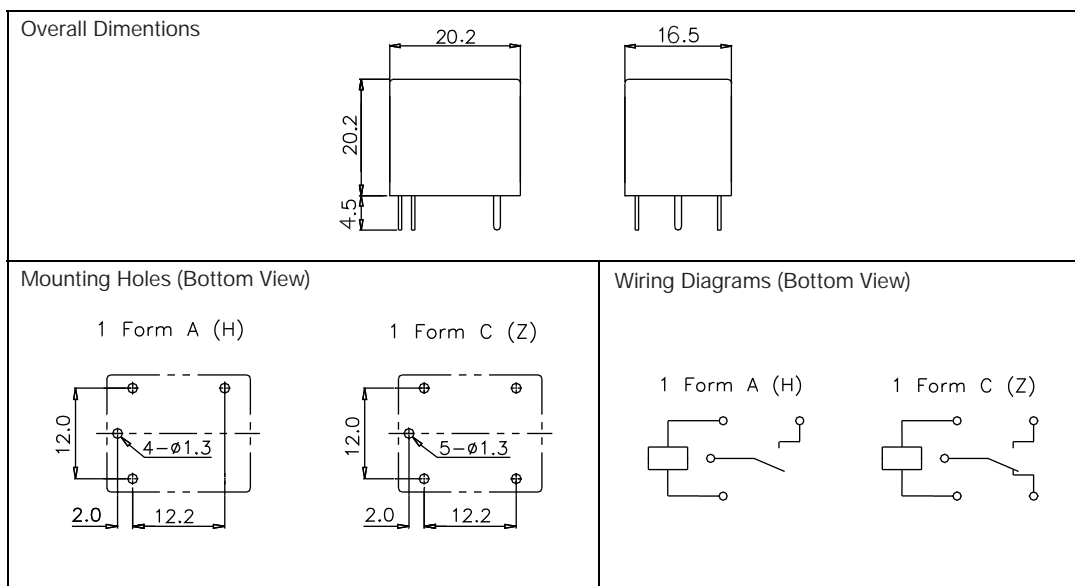

NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
2. Custom-made services available with operational quantity. Please let us know your special requirements.
3. Specifications subject to change without prior notice.

T Y H Enterprise Limited
 Room 1620B, Nan Fung Centre
 264-298 Castle Peak Road
 Tsuen Wan, N.T.
 Hong Kong
 Tel: 852-2416-0132
 Fax: 852-2413-6229
<http://www.tyhhk.com>
 email: info@tyhhk.com

Plant: Shanghai Hi-Gradex Relay Mfg. Co., Ltd.
 918 Shixin Road
 Airport Town
 Pudong New Area
 Shanghai 201202
 China
 Tel: 86-21-6299-5619 / -5877
 Fax: 86-21-6299-5619
 email: tyhesh@online.sh.cn